

SaluSpa™

The Comfortable, Affordable, Go-Anywhere Spa!™

13-Steps to Maintain Your SaluSpa™

Congratulations on the purchase of your new SaluSpa™. Before operating the SaluSpa™ be sure to follow these 13 steps. Damage resulting from misuse is not covered by the manufacturer's warranty.

1




The SaluSpa™ should not be setup or left out in temperatures lower than 4°C (40°F).

2




The GFCI plug must be tested before each use to avoid risk of electric shock. Do not use the pump if this test fails.

3

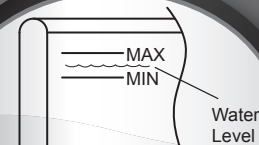

Fill the water level between maximum and minimum printed on the SPA wall.

4



Remove Stopper Caps
Ensure water is circulating between the Spa and the Pump and that the Stopper Caps have been removed.

5



Be sure to set your desired temperature.

10



Hibernate Function:

After 72 hours of operation (except timer function), the pump will hibernate and "End" will be display on the LED. When the pump is hibernating both the rapid heating and water filtration functions are disabled. To re-active the pump simply press any button on the control panel.

11



IMPORTANT NOTICE:


This unit will auto lockout after 5 minutes of inactivity. To  simply place a finger over function button for 3 seconds.

12




We recommend you take a shower before using your Spa, as cosmetic products, lotions, and other residues on the skin can quickly degrade water quality.

13




6




Check and ensure the Spa and all adapters are not leaking.

9



All Spas require the use of chemicals in order to keep the water clear and safe.

8



Change the Filter Cartridges regularly

7



Clean and maintain the Filter Cartridge regularly.



The Comfortable, Affordable, Go-Anywhere Spa!™

Maintaining Spa Water

Proper disinfection and filtration of spa water kills harmful micro-organisms, removes oils, make up, lotion and ensures the water is clean and safe.

Spa water quality can be extremely hazardous to your health. We recommend you do the following points:

- A.** Clean filter cartridges every day and change filter cartridges every week depending on use.
- B.** Change water regularly and use appropriate Spa pool chemicals.

NOTE: When performing chemical maintenance, activate the Massage function to quickly dissolve chemicals into the water.

NOTE: Remove the chemical dispenser from spa when the spa is in use.

All spas require the use of pool chemicals. Pool chemicals are potentially toxic and should be handled with care. There are serious health risks from chemical vapors and the incorrect labeling and storage of chemical containers. Please consult your local pool supply retailer for more information about chemical maintenance. Pay close attention to the chemical manufacturer's instructions. Spa damage resulting from misuse of chemicals and mismanagement of spa water is not covered by the warranty.

1. Water Balance

We recommend maintaining your water pH between 7.4 and 7.6, total alkalinity between 80 and 120ppm and free chlorine between 2 to 4ppm. Purchase a test kit to test your water chemistry before using the spa and continue to test the water no less than once a week. Low pH will cause damage to the spa and pump. Damage resulting from chemical imbalance is not covered by the warranty.

2. Water Sanitation


The spa owner must regularly maintain pool water with scheduled maintenance (daily if necessary).

Note: Sanitizers chemically control bacteria and viruses present in spa water.

3. The Bestway SaluSpa is supplied with a chemical dispenser.

Please note: This is supplied for use with chemical tablets only. Do not use granules.

SaluSpa™ Xtras

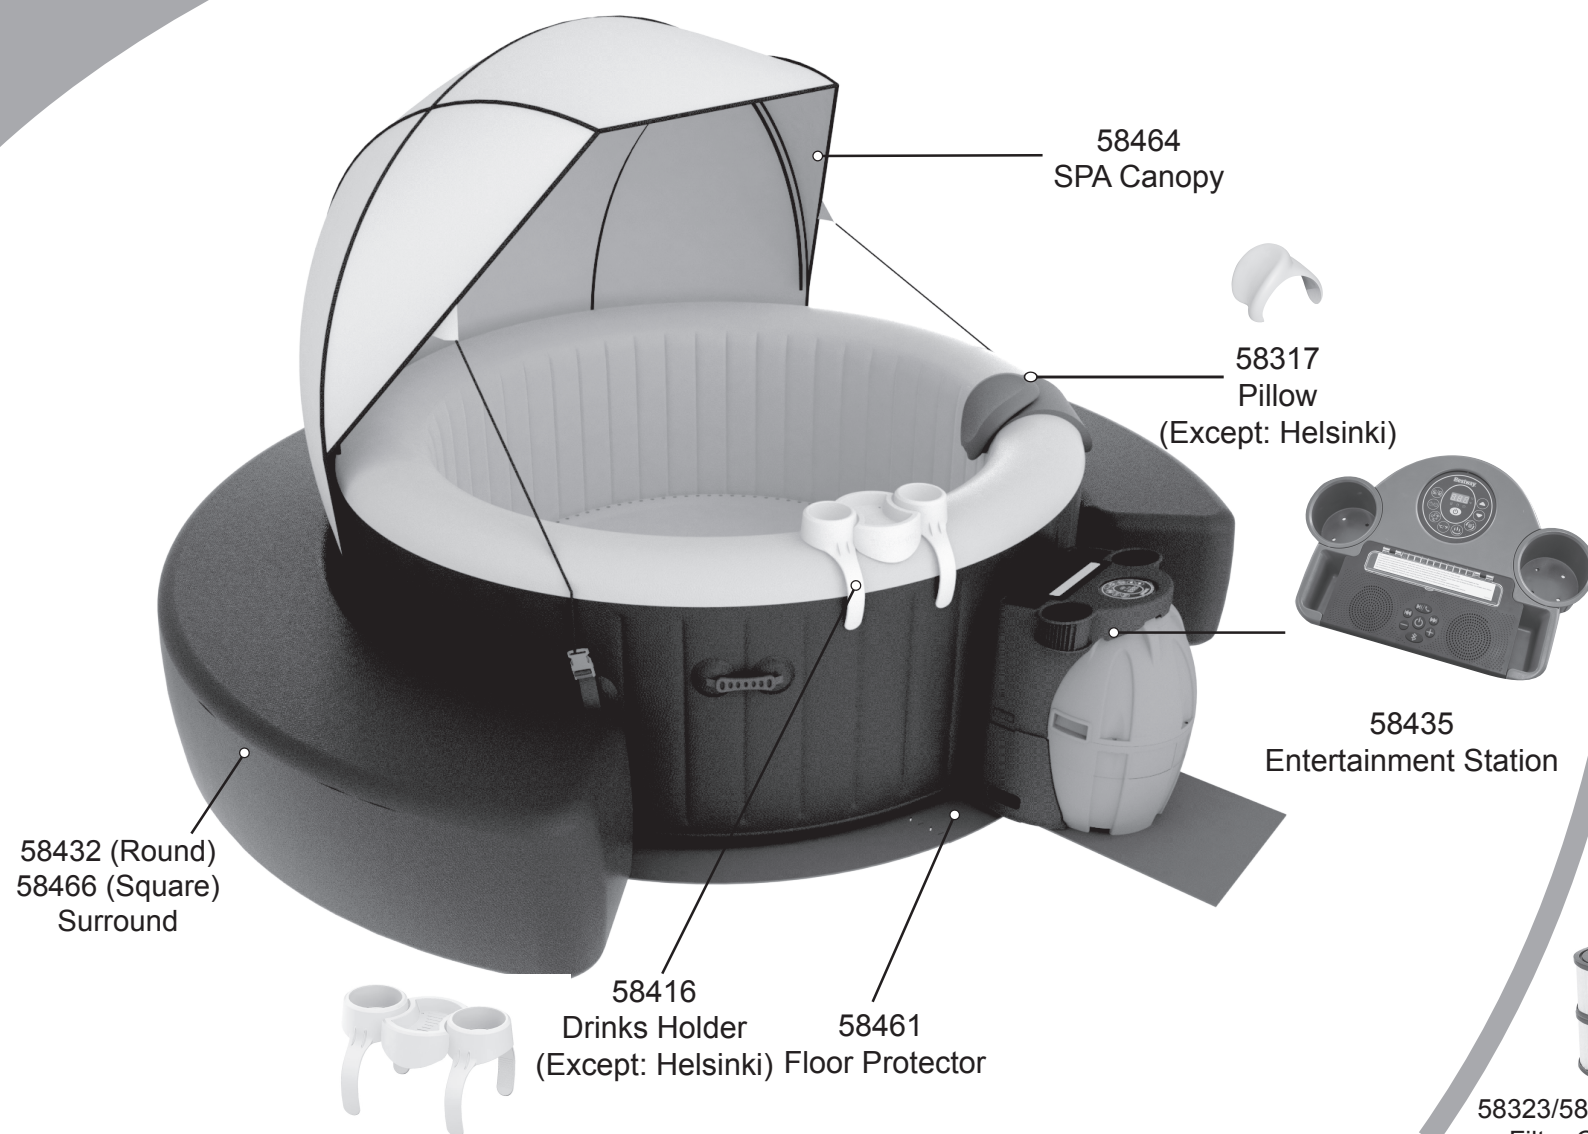

Cleaning

